

1/-21-00

EE 318 061 31245

A

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Docket No. AUS000181US1

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of Inventor(s):  
**PAUL ALAN SNOW**

jc690 U.S. PTO  
09/552861  
04/20/00

For: **AN APPLICATION DEVELOPMENT SERVER AND A MECHANISM FOR PROVIDING DIFFERENT VIEWS INTO THE SAME CONSTRUCTS WITHIN A STRONGLY ENCAPSULATED ENVIRONMENT**

Enclosed are also:

- ☒ 44 Pages of Specification including an Abstract  
☒ 7 Pages of Claims  
☒ 11 Sheet(s) of Drawings  
☒ A Declaration and Power of Attorney  
☒ Form PTO 1595 and assignment of the invention to IBM Corporation

**CLAIMS AS FILED**

| FOR                       | Number<br>Filed | Number<br>Extra | Rate    | Basic Fee<br>(\$690) |
|---------------------------|-----------------|-----------------|---------|----------------------|
| Total Claims              | 24              | -20 = 4         | X \$ 18 | = \$72.00            |
| Independent Claims        | 9               | -3 = 6          | X \$ 78 | = \$468.00           |
| Multiple Dependent Claims | 0               | 0               | X \$260 | = \$ 0               |
| <b>Total Filing Fee</b>   |                 |                 |         | <b>= \$1230.00</b>   |

- ☒ Please charge \$1230.00 to IBM Corporation, Deposit Account No. 09-0447.  
☒ The Commissioner is hereby authorized to charge payment of the following fees associated with the communication or credit any over payment to IBM Corporation, Deposit Account No. 09-0447. A duplicate copy of this sheet is enclosed.  
☒ Any additional filing fees required under 37CFR § 1.16.  
☒ Any patent application processing fees under 37CFR § 1.17.

Respectfully,

David A. Mims, Jr.

Reg. No. 32,708

Intellectual Property Law Dept.

IBM Corporation

11400 Burnet Road 4054

Austin, Texas 75758

Telephone: (512) 823-0950

Docket No. AUS000181US1

**AN APPLICATION DEVELOPMENT SERVER AND A MECHANISM FOR  
PROVIDING DIFFERENT VIEWS INTO THE SAME CONSTRUCTS WITHIN  
A STRONGLY ENCAPSULATED ENVIRONMENT**

5                   **Cross Reference to Related Applications**

The present application is related to co-pending  
U.S. Patent Application Serial No. \_\_\_\_\_ (IBM  
Docket No. AUS0000178US1) entitled "Strongly Encapsulated  
10 Environments for the Development, Deployment, and  
Management of Complex Application configurations" filed  
even date herewith, to co-pending U.S. Patent Application  
Serial No. \_\_\_\_\_ (IBM Docket No. AUS000179US1  
entitled "A Method for Creating Encapsulated Applications  
15 with Controlled Separation form an Application's Runtime  
Representation" filed even date herewith, and to  
co-pending U.S. Patent Application Serial No.  
\_\_\_\_\_ (IBM Docket No. AUS000180US1) entitled  
"Mechanism for Automated, Generic Application Damage  
20 Detection and Repair in Strongly Encapsulated  
Applications" filed even date herewith. The content of  
the above mentioned commonly assigned, co-pending U.S.  
Patent applications are hereby incorporated herein by  
reference for all purposes.

25

**BACKGROUND OF THE INVENTION**

**1. Technical Field:**

30           The present invention relates generally to the field  
of computer software and, more particularly, to a method,  
system, and apparatus for controlling and distributing  
software development environments that are fully and

Docket No. AUS000181US1

correctly configured and tuned to address the various roles developers, test teams, and management, and others play in the process of developing software applications.

5    **2. Description of Related Art:**

          A continual problem with software development is the need to control and distribute environments that are fully and correctly configured. The source code of an application is generally understood to define an  
10 application, but a pragmatic view would have to also include in this application definition a host of other software, including the operating system, compilers, tools, directory structures, debuggers, and configuration settings necessary to be effective in developing,  
15 compiling, testing, and using the application. When developing large applications, the various roles begin to require different tools, and structures. When development teams are large, these environments, tuned to support each role, must be distributed to all the team  
20 members. This process is currently a manual, complex, and error prone effort.

          The complexity of managing these environments and the frequently updated application images development requires leads to a steep learning curve as developers  
25 must come up to speed with the configurations a given development effort uses, its source tree, state of development, and other structures and procedures. Usually the developer must construct their own development environment using imperfect instructions from  
30 a host of sources for each tool used. While this does work, it costs the development effort a significant

Docket No. AUS000181US1

amount of time, and produces odd effects as differences in environments produce different behaviors which must be identified and understood.

The source code for an application provides an  
5 incomplete definition from which the application is built. The missing pieces include the tools, build procedures, and environment configuration for building the application. Most companies today archive not only the source code for applications they develop, but also  
10 include every tool, operating system, editor, documentation, debuggers, test data and programs, and other software used in conjunction with development, debugging, testing, and deploying the application. Usually there is an attempt to document the use and  
15 mindset behind development and configuration decisions as well. Yet this is an imperfect approach, since the ad hock nature common in software development insures that custom environments used by each developer will be quite different from the environment reconstructed from such an  
20 archive.

These problems can be reduced when software developers utilize integrated development environments (IDEs). These environments integrate most of the common and basic tools of software development into one  
25 application. This integration reduces the effort required to set up a development environment, insures a standard platform from which the application is developed, and better supports the ability to archive a working development environment. However, for the  
30 production of builds and for testing purposes, the use of command line tools such as makefiles and commandline

Docket No. AUS000181US1

compilers are preferred. This is because integrated development environments do not have a simple, standard interface or mechanism that allows the automated generation of standard builds and revisions. Standard  
5 source code control programs also work best when applications are defined by a set of directories and files. Therefore, the usual approach is to export and import source out of and into the IDE to support most of the software development activities that are not strictly  
10 related to software development and debugging.

Developing and managing the procedures for supporting these different views is inconvenient, and differences in commandline compilers and debuggers and those of the IDE can lead to bugs that are difficult and time consuming to  
15 detect and fix.

Software development is also a rather complex process where pieces need to be designed, developed, documented, and tested. As a feature moves through this process, it exists in very different forms. This process  
20 may include steps where a feature is proposed, specified, designed, implemented, debugged, tested, folded into the standard build, and included in a released product. At each step, the feature may exist in very different forms, and take the focus of different members of the  
25 development team. This is a workflow management problem where the feature under development can be rather fluid, and difficult to understand and define. These difficulties result in development processes that are manual and complex because defining what is required to  
30 move a feature from one team member to the next may be different for each feature and for each boundary crossed.

Docket No. AUS000181US1

Therefore, there is a need to provide a method, system and apparatus that provides a complete definition of an application, the roles supported in this application's development, and definition of the environment required  
5 to support each role, and the representation of the application within each role. Developers need an automated process for handing a feature to the test team. All team members need to be able to select a given build, and have delivered the view of that build their job  
10 requires. The Build team needs a completely automated facility for producing the versioned build for the quality assurance team. The use of IDEs needs to be supported by automated processes for the development team.

15

Docket No. AUS000181US1

### SUMMARY OF THE INVENTION

The present invention provides an application development server for aid in developing software. In a preferred embodiment, the application development server includes a processor, a memory unit, a storage unit, and a communications link to a network. The working definition defined environment is stored on the storage unit. The processor executes instructions stored in the memory unit that allow the application development server to receive requests for working definition defined environments from clients, retrieve the working definition defined environment from the storage unit and send the working definition defined environment to the client via the communications link to the network.

Docket No. AUS000181US1

### BRIEF DESCRIPTION OF THE DRAWINGS

The novel features believed characteristic of the invention are set forth in the appended claims. The invention itself, however, as well as a preferred mode of use, further objectives and advantages thereof, will best be understood by reference to the following detailed description of an illustrative embodiment when read in conjunction with the accompanying drawings, wherein:

**Figure 1** depicts a pictorial representation of a distributed data processing system in which the present invention may be implemented;

**Figure 2** depicts a block diagram of a data processing system that may be implemented as an application development server in accordance with the present invention;

**Figure 3** depicts a block diagram of a data processing system in which the present invention may be implemented;

**Figure 4A** depicts a block diagram illustrating a data structure for strongly encapsulating an application in accordance with the present invention;

**Figure 4B** depicts a block diagram of a new model for a computer architecture in accordance with a preferred embodiment of the present invention;

**Figure 5** depicts a portion of XML code demonstrating one method the requirements part of the working definition may be represented in accordance with a preferred embodiment of the present invention;

**Figure 6** depicts a block diagram illustrating a



Docket No. AUS000181US1

manner in which a computing environment may be represented as a set of working definitions for a set of applications and a working definition for the computing environment itself;

5       **Figure 7A** depicts a block diagram illustrating a data structure for representing a computing environment as a working definition in accordance with the present invention;

10       **Figure 7B** depicts a block diagram illustrating the relationship between working definition defined software and the working definition defined environment in the context of the database and accounting package example in accordance with the present invention;

15       **Figure 8** depicts a block diagram illustrating a configuration facility that monitors the data processing system and continuously updates the working definitions of the environment and applications in accordance with the present invention;

20       **Figure 9** depicts a flowchart illustrating a method of continuously updating the working definitions of the environment and applications within a data processing system such that different view into the same constructs may be obtained in accordance with a preferred embodiment of the present invention;

25       **Figure 10** depicts a block diagram illustrating the use of an application development server for providing the ability to build an application in total, with all aspects of building procedure, documentation, and issue tracking covered in accordance with the present  
30       invention; and

**Figure 11** depicts a flowchart illustrating an

5

[illegible]

Docket No. AUS000181US1

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

With reference now to the figures, and in particular  
5 with reference to **Figure 1**, a pictorial representation of  
a distributed data processing system is depicted in which  
the present invention may be implemented.

Distributed data processing system **100** is a network  
of computers in which the present invention may be  
10 implemented. Distributed data processing system **100**  
contains network **102**, which is the medium used to provide  
communications links between various devices and  
computers connected within distributed data processing  
system **100**. Network **102** may include permanent  
15 connections, such as wire or fiber optic cables, or  
temporary connections made through telephone connections.

In the depicted example, server **104** is connected to  
network **102**, along with storage unit **106**. In addition,  
clients **108**, **110** and **112** are also connected to network  
20 **102**. These clients, **108**, **110** and **112**, may be, for  
example, personal computers or network computers. For  
purposes of this application, a network computer is any  
computer coupled to a network that receives a program or  
other application from another computer coupled to the  
25 network. In the depicted example, server **104** provides  
data, such as boot files, operating system images and  
applications, to clients **108-112**. Clients **108**, **110** and  
**112** are clients to server **104**. Distributed data  
processing system **100** may include additional servers,  
30 clients, and other devices not shown. Distributed data

Docket No. AUS000181US1

processing system **100** also includes printers **114**, **116** and **118**. A client, such as client **110**, may print directly to printer **114**. Clients such as client **108** and client **112** do not have directly attached printers. These clients  
5 may print to printer **116**, which is attached to server **104**, or to printer **118**, which is a network printer that does not require connection to a computer for printing documents. Client **110**, alternatively, may print to printer **116** or printer **118**, depending on the printer type  
10 and the document requirements.

In the depicted example, distributed data processing system **100** is the Internet, with network **102** representing a worldwide collection of networks and gateways that use the TCP/IP suite of protocols to communicate with one  
15 another. At the heart of the Internet is a backbone of high-speed data communication lines between major nodes or host computers consisting of thousands of commercial, government, education, and other computer systems that route data and messages. Of course, distributed data  
20 processing system **100** also may be implemented as a number of different types of networks such as, for example, an intranet or a local area network.

**Figure 1** is intended as an example and not as an architectural limitation for the processes of the present  
25 invention.

Referring to **Figure 2**, a block diagram of a data processing system which may be implemented as an application server, such as application development server **104** in **Figure 1**, is depicted in accordance with  
30 the present invention. Data processing system **200** may be

Docket No. AUS000181US1

a symmetric multiprocessor (SMP) system including a plurality of processors **202** and **204** connected to system bus **206**. Alternatively, a single processor system may be employed. Also connected to system bus **206** is memory controller/cache **208**, which provides an interface to local memory **209**. I/O bus bridge **210** is connected to system bus **206** and provides an interface to I/O bus **212**. Memory controller/cache **208** and I/O bus bridge **210** may be integrated as depicted.

Peripheral component interconnect (PCI) bus bridge **214** connected to I/O bus **212** provides an interface to PCI local bus **216**. A number of modems **218-220** may be connected to PCI bus **216**. Typical PCI bus implementations will support four PCI expansion slots or add-in connectors. Communications links to network computers **108-112** in **Figure 1** may be provided through modem **218** and network adapter **220** connected to PCI local bus **216** through add-in boards.

Additional PCI bus bridges **222** and **224** provide interfaces for additional PCI buses **226** and **228**, from which additional modems or network adapters may be supported. In this manner, server **200** allows connections to multiple network computers. A memory mapped graphics adapter **230** and hard disk **232** may also be connected to I/O bus **212** as depicted, either directly or indirectly.

Those of ordinary skill in the art will appreciate that the hardware depicted in **Figure 2** may vary. For example, other peripheral devices, such as optical disk drives and the like, also may be used in addition to or in place of the hardware depicted. The depicted example

Docket No. AUS000181US1

is not meant to imply architectural limitations with respect to the present invention.

The data processing system depicted in **Figure 2** may be, for example, an IBM RS/6000, a product of  
 5 International Business Machines Corporation in Armonk, New York, running the Advanced Interactive Executive (AIX) operating system.

With reference now to **Figure 3**, a block diagram of a data processing system in which the present invention may  
 10 be implemented is illustrated. Data processing system **350** is an example of a client computer, such as, for example, one of clients **108-112** in **Figure 1**. Data processing system **350** employs a peripheral component interconnect (PCI) local bus architecture. Although the  
 15 depicted example employs a PCI bus, other bus architectures such as Micro Channel and ISA may be used. Processor **352** and main memory **354** are connected to PCI local bus **356** through PCI Bridge **358**. PCI Bridge **358** also may include an integrated memory controller and cache  
 20 memory for processor **352**. Additional connections to PCI local bus **356** may be made through direct component interconnection or through add-in boards. In the depicted example, local area network (LAN) adapter **360**, SCSI host bus adapter **362**, and expansion bus interface  
 25 **364** are connected to PCI local bus **356** by direct component connection. In contrast, audio adapter **366**, graphics adapter **368**, and audio/video adapter (A/V) **369** are connected to PCI local bus **356** by add-in boards inserted into expansion slots. Expansion bus interface  
 30 **364** provides a connection for a keyboard and mouse

Docket No. AUS000181US1

adapter **370**, modem **372**, and additional memory **374**. SCSI host bus adapter **362** provides a connection for hard disk drive **376**, tape drive **378**, and CD-ROM **380** in the depicted example. Typical PCI local bus implementations will  
5 support three or four PCI expansion slots or add-in connectors.

Those of ordinary skill in the art will appreciate that the hardware in **Figure 3** may vary depending on the implementation. For example, other peripheral devices,  
10 such as optical disk drives and the like may be used in addition to or in place of the hardware depicted in **Figure 3**. The depicted example is not meant to imply architectural limitations with respect to the present invention. For example, the processes of the present  
15 invention may be applied to a multiprocessor data processing system.

With reference now to **Figure 4A**, a block diagram illustrating a data structure for strongly encapsulating an application is depicted in accordance with the present  
20 invention. In a preferred embodiment, any software application may consist of the following elements: identity **404**, code **406**, requirements **408**, data **410**, artifacts **412**, and settings **414**. These elements structure the application's defining characteristics.  
25 The defining characteristics define the persisted state, settings, and structures required to build a valid runtime representation of the application within its targeted computer system. The application's working definition documents and controls each of these elements  
30 of the application.

The application's identity **404** is defined by the

Docket No. AUS000181US1

application developer, and consists of the application's name, version, etc. The identity section **404** may also provide documentation, web links, etc. for the application useful both to automated management services and users.

The code **406** represents the executable images, files, source code, and any other representation of the executable portion of the application that the application developer may decide to use. The code section **406** may also include executable images, files, source code, etc. to enable the installation, maintenance, configuration, uninstall, etc. of the application through the application's life cycle.

The requirements section **408** defines what directory structures, environment variables, registry settings, and other persisted structures must exist and in what form for this application to be properly constructed and installed in the persisted image of a computer system. The requirements section **408** also details any services and applications that are required to support this application. The requirements section **408** details these concepts as a set of constraints, and also may define the order in which these constraints must be resolved when such order is required. The requirements **408** also define the circumstances and constraints for the use of application specific installation, maintenance, configuration, or uninstall code.

The Data section **410** defines data tables, configuration files, and other persisted structures for the application. The data section **410** is used to hold UI preferences, routing tables, and other information that



Docket No. AUS000181US1

makes the application more usable.

The Artifacts **412** are the persisted form of the value provided by the application. Examples of Artifacts **412** include documents, spreadsheets, databases, mail  
 5 folders, text files, image files, web pages, etc. These are the files that contain the user's work ("user" in this context can be human or application).

The settings **414** are the persisted structures created or modified within the runtime representation  
 10 that are intended to satisfy the requirements for the application. A distinction is drawn between the requirements **408** (which may specify a range of values in a registry setting or the form a directory structure must conform to) and the actual solution constructed in the  
 15 runtime image **100** to satisfy these requirements.

The Requirements **408** are provided by the developers, application management software, environments, etc. Settings are made in an effort to resolve those requirements, and identify what requirements a setting is  
 20 intended to satisfy.

With reference now to **Figure 4B**, a block diagram of a new model for a computer architecture **400** is depicted in accordance with the present invention. The new computer architecture **400** of the present invention  
 25 builds on the standard architecture.

The core, standard, basic computer architecture is comprised of four elements: one or more processors **456**, one or more memory spaces **454**, one or more mechanisms for managing input/output **458**, and one or more mechanisms for  
 30 defining persistence **452**. The Processor(s) **456**

Docket No. AUS000181US1

perform(s) the computations and instructions of a given application by loading its initial state into memory from the persisted image for that application.

Persistence **452** is the persisted storage of the applications apart from memory **454**. The basic nature of computer systems requires that all applications be stored somewhere. Even if a person types a program into a computer system every time they wish to use that program, the program is always stored somewhere, even if that storage is in someone's head. How an application is stored does not vary much from platform to platform. Applications are stored as, for example, executable files and libraries, files, databases, registry entries, and environment variables. Typically these files, databases, etc. are stored on a physical nonvolatile storage device such as, for example, Read only Memory chips, a hard disk, a tape, CD-ROM, or a DVD. Even in the most complex applications, the number of distinct persisted structures is really rather small, although there can be many of each type.

Regardless of the application's complexity, it depends on its persisted image. If the persisted structure is correct, the application will execute. If the persisted structure is wrong, the application will not execute.

In addition to these traditional computer architecture elements, the new computer architecture **400** also includes an application's working definition **402**. In a preferred embodiment, an application's Working definition **402** is an extensible markup language (XML) representation of the identity **404**, code **406**,

Docket No. AUS000181US1

requirements **408**, data **410**, artifacts **412**, and settings **414**; that is it includes all of the defining characteristics for the application. By defining these elements, separate from the runtime representation **100** of an application, working definitions **402** provides a way to strongly encapsulate an application which is compatible with operating systems that expect applications in an unencapsulated form. Working definitions define a new, universal picture of a computer system. Working definitions do not interfere with any operating system or platform because they have no active behavior. Working definitions define the application's runtime representation **450** by defining what an application is, what it requires, and what was done to give it what it needs, within a given computer system. While working definitions have no active behavior, they enable the implementation of a variety of automated services. These services include application life cycle management, resource tracking, application installation, damage detection and repair, computer system optimization, etc.

Strong encapsulation of state greatly reduces the global complexity of a computer system. States such as, for example, path requirements, file extensions, registry settings, program files, can be maintained in a pure state outside of the runtime representation **450**. Because the runtime version of the application **450** is a redundant representation, it can be reconstructed, and fixed using the working definition defined version of the application as the standard. Important modifications can be persisted back to the application's Working Definition

Docket No. AUS000181US1

as a background task.

Working definitions use XML to define a flexible format for structuring the critical information about an application, thus encapsulating the application. XML provides the ability to extend working definitions to fit future requirements and, XML, just like the hypertext markup language (HTML) of the world wide web, can be as simple or as complex as the job requires. The actual size of a working definition is very small compared to the application it defines, even if the application is just a batch file. At the same time, working definitions can be used to describe vast, distributed, multi-platform applications.

Working definitions are platform and technology independent and address universal configuration issues. Furthermore, working definitions can be used as an open standard. Working definitions provide configuration information to services and to applications as well as providing bookkeeping support.

An application's valid runtime representation is one that satisfies a finite, structured set of constraints. Therefore, XML is an ideal method because XML provides an ideal representation for structured data and supports the ability to define links that allow tracking of internal relationships or for including references to structures defined externally. Furthermore, XML is designed to be easily extended and is platform independent.

However, XML is not a good representation for constant modification and access. The runtime representation for the application provides the application with an efficient executable representation.

Docket No. AUS000181US1

To provide an application with an efficient executable representation, the XML can detail the required runtime structure and requirements for the application. Using these instructions, the application can be constructed  
5 and executed automatically. Prerequisites, in the proper order and with the proper configuration will also be constructed and executed automatically.

As the application executes, changes made to the application's state may be made as they are presently,  
10 that is, to the runtime representation. The XML specifies the important files to be persisted, and this persistence may be done in the background. The overhead is thus very minimal with little effect on the performance as viewed from a user's perspective.

15 The nature of the problem of automating management and configuration of computer systems requires a common, computer friendly and people friendly, complete representation of each software component. Without this information, the automated management of computer systems  
20 is not possible.

While the working definitions have been described herein and will be described henceforth with reference to an XML representation of the application, any number of other technologies and approaches might be used as well  
25 as will be obvious to one of ordinary skilled in the art. For example, encapsulation could also be implemented using databases or with Zip files. Also, a database could be used for the actual implementation of the support for the encapsulation with XML used as a transfer  
30 protocol.

Furthermore, although described primarily with

Docket No. AUS000181US1

reference to constructing Working Definitions using XML, Working Definitions may be constructed using any structured format. Possible choices, for example, include the use of other structured forms. These

5 include:

- Object based technologies (Java Beans, CORBA objects, C++ objects, etc.). These would have to be backed by some sort of database.
- Object Oriented databases. These are a mix of  
10 databases and Object based technologies.
- Functional technologies. One could build a PostScript-like or Lisp-like language (compiled or interpreted) that defines these structures.
- Rule based technologies. Since Working  
15 Definitions generally resolve sets of constraints, this may well be the best way of implementing services that execution against the constraints that Working Definitions define. Working definitions could be constructed directly into Rule form,  
20 similar to forward chaining technologies such as ART, or backward chaining technologies such as Prolog.
- Tagged formats. XML is an example of a tagged format. However, there are other tagged formats  
25 that would work just as well. Tagged Image Format (TIFF), although generally used for defining images, may also be used to define Working Definitions since the use of custom tags is supported. Additionally, since TIFF is a binary format, it could hold the  
30 executable code and binary data. Other tagged formats include SGML, TeX, and LaTeX.

Docket No. AUS000181US1

In addition to these examples of structured formats, there are certainly other formats and representations that would also work for constructing Working Definitions. Any technology that can 1) represent  
 5 structured data, 2) support links to outside sources, and 3) can be used across platforms could be used to define Working Definitions.

With reference now to **Figure 5**, a portion of XML code is shown, demonstrating one method for representing  
 10 the requirements element of the working definition, in accordance with a preferred embodiment of the present invention. The portion **500** of XML depicted is only snippet of a representation of the requirements element of the working definition and is given merely as an  
 15 example. Furthermore, this portion **500** of XML is overly simplified, but does demonstrate how this information might be represented.

Platform tag at **502** reflects the requirement of the application that the platform be an xx86 type of  
 20 computer, such as, for example, an Intel Pentium® class computer, running a Windows 95™, Windows 98™, or Windows NT™ operating system. Pentium is a registered trademark of Intel Corporation of Santa Clara, California. Windows 95™, Windows 98™, and Windows NT™ are all either  
 25 trademarks or registered trademarks of Microsoft Corporation of Redmond, Washington.

Services tag at **504** indicates that the application requires the TCP/IP and file system services.  
 Prerequisites tag at **506** indicates that the application  
 30 Adobe Acrobat® is a prerequisite (i.e., requirement) for

Docket No. AUS000181US1

this application. Adobe Acrobat is a registered trademark of Adobe Systems Incorporated of San Jose, California.

The registry tag at **508** describes a registry entry.

- 5 In this example, a Registry entry and a couple of keys are defined.

The Directory tag at **510** describes a couple of directories, the "programRoot" (which is required, but not specified by name) and a subdirectory

- 10 "programRoot"/jclass.

Section **512** describes adding the programRoot directory to the path environment variable. The directory "programRoot"/jclass is also described as necessary to be added to the classpath environment

- 15 variable.

The <test>...</test> tags in Section **512** describe tests that can be used to verify the setup of the enclosing section. This is one possible way of describing how to use application specific code to

- 20 maintain an application.

Thus far, working definitions have been described in terms of strongly encapsulating applications and how it can be used in a computer system made up of applications we simply wish to install and use. However, the reality

- 25 of computer systems is really much more complicated.

Each application within a computer system can be configured properly from its own perspective and still fail to work as a whole. This is because applications are used as building blocks to create integrated

- 30 environments. All the applications themselves can work fine, but not work together.



Docket No. AUS000181US1

Thus, a need exists to define additional constraints on applications above and beyond those of the application alone. For example, a database has its set of requirements and, once installed, is available to support the user and their database applications. A given accounting application may require that certain tables and minimal data sets be create in the database. The typical approach currently is to require that the database be installed prior to the accounting application so that the accounting application can create what it needs during its own installation. Otherwise, the accounting application may document a procedure to create what it needs in the database and require the user to do this themselves.

Thus, in an environment created from a large set of applications, complications of installation order and manual setup procedures can be hugely expensive, error prone and irritating.

On the other hand, the number and size of these constraints are rather trivial from a computer's perspective. The problem, once again, arises from the fact that these constraints are not defined in a standard, maintainable, computer friendly format. However, working definitions provide that standard maintainable, computer friendly and human friendly format.

Thus, with reference to **Figure 6**, a computing environment may be represented as a set of working definitions for a set of applications **604-608** and a working definition for the computing environment itself **602**.

Docket No. AUS000181US1

The observation to make at this point is that the facilities described update the runtime environment in a manner that satisfies a set of constraints, just as we do manually currently. For example, the database may not, by nature, require a certain directory in an environment variable, such as, for example, the PATH or CLASSPATH. However, in our constructed environment of applications, new constraints are introduced. For example, an accounting application may support several different database applications with differing constraints for each. Settings within the accounting applications may also be determined by the databases, such as, for example, registry settings to database directories. Furthermore, these constraints may vary depending on what features are required by the user.

From a user's perspective, their choices are fairly simple. They want a given database application and a given accounting package to run on a given operating system. The accounting package will be used to perform a given subset of tasks of the many tasks the accounting package might support.

The database and the accounting package are, in this example, independent products. Currently, there is no industry standard method to define the relationship between the database and the accounting package other than via some manual setup routine. If this setup routine has to be repeated, it can lead to significant support and training costs. Under the current system, there is no way of defining and managing these kinds of interactions, such as the interaction between the database and the accounting package.

Docket No. AUS000181US1

With reference now to **Figure 7A**, a block diagram illustrating a data structure for representing a computing environment as a working definition is depicted in accordance with the present invention. The computing environment **700** is a structured set of constraints and descriptions, links, files, settings, etc. organized along the basic categories Identity **702**, Code **704**, Requirements **706**, Data **708**, Artifacts **710**, and Settings **712** in similar fashion to elements **404-414** in **Figure 4** for working definition backed applications. In addition to the definition of elements **404-414** which apply equally to elements **702-712**, the Requirements **706** refer to one or more additional Working Definition defined environments or applications, such as, for example, application working definitions **604**, **606**, and **608** in **Figure 6**.

The Working Definition based computing environment **700**, in the depicted embodiment, uses an extensible markup language (XML) to define an idealized view of the file system, configuration settings, and state of the data processing system. This definition is translated to a runtime representation in order to execute these applications.

The Working Definition based environment **700** may be replicated, moved, or merged to another platform without requiring the user to reinstall or modify anything. Missing resources can be supplied after the fact, since the Working Definition defined environment **700** defines the construction of the runtime environment through its own settings and those of referenced Working Definition backed applications.

The constraints of an environment, as expressed in

Docket No. AUS000181US1

the Working Definition **700** through elements **702-712**, may allow for conditional expression of applications. This allows the capability of deploying the same environment using different applications that satisfy the

5 environment's requirements. For example, if a word processor is all that is required, MS Word™, Wordperfect®, or Lotus WordPro® might satisfy this requirement on different computer systems for the same environment. Word is a product and trademark of

10 Microsoft Corporation of Redmond, Washington. Wordperfect is a product and a registered trademark of Corel Corporation of Ottawa, Ontario, Canada. Wordpro is a product and a registered trademark of Lotus Development Corporation of Cambridge, Massachusetts.

15 The constraints of an environment expressed in working definition defined environment **700** also may allow for conditional expression of types of installations of applications. This allows the capability of deploying the same environment using the same applications on

20 different operating systems. For example, if the operating systems supported include the Mac, Windows 95, and Linux, then the appropriate platform versions of each application is installed when the environment is installed on those platforms.

25 Additionally, the constraints of an environment, as expressed in the working definition for the environment **700**, may allow for the conditional expression of the environment's own configuration. For example, a distributed application may require different

30 applications, servers, clients, configuration settings, etc. depending on which machine the environment is

Docket No. AUS000181US1

installed on. This allows one environment definition to be constructed, managed, preserved, and distributed while expressing itself as appropriate in each computer system taking part in the distributed application.

5        Since a computing environment may be as simple as a set of unrelated applications (such as set of commandline tools, batch files, directory structures, text files, simple applications, etc.) or as complex as a set of operating systems, distributed programming applications, 10 web servers, CORBA services and programs, compilers, Integrated development environments, Java VMs, and so forth, working definitions of the environment must be as flexible as needed to adequately describe and define the constraints and requirements of the various applications 15 within the computing environment. In the first case, the constraints for the environment may be as simple as a list of applications, path requirements, and a few shortcuts and desktop descriptions. In the second case, the constraints may provide for the construction of 20 directories, files, registry settings, environment variables, and the ordered configuration of each component.

In middleware applications, controlling and assuring the configuration of so many applications is a major 25 problem in developing, testing, and deploying Internet and Web-based solutions. Working Definition based computing environments provide the mechanism to define all these constraints, and allow the "expression" of applications selectively based on the platforms and 30 identities of the computer systems the environment is installed on.

Docket No. AUS000181US1

Working Definition based environments provide the ability to define a distributed application as a single environment that can be examined, preserved, configured, managed, and distributed. The results of installing this  
5 environment on any one platform depends upon both the environment and the constraints present in that platform and the environment itself.

For example, a middleware application based on Component Broker may require a DB2 database. The DB2  
10 database may be installed on a Unix platform. Component Broker may be installed on a different Unix platform, as well as a Windows NT platform to support development. A distributed environment definition can be constructed many different ways. One method would be as follows.

15 First DB2 is defined as existing on a particular Unix machine. The configuration of DB2 and other aspects of that Unix machine critical to the middleware application are recorded and managed in the Working Definition based Environment definition. The environment  
20 is then installed on the Unix platform slated to support Component Broker. Since this platform is not the DB2 platform (as specified in the requirements of the environment) the installation of DB2 is suppressed. A DB2 client that runs against the DB2 platform is  
25 required, however. The DB2 client, Component Broker, the Java VM, and other applications supporting the middleware solution are added to the distributed environment. The expression of these applications is keyed again to the platform. The Environment is then installed on NT.  
30 Component Broker is again installed and configured (as required by the NT platform) and configuration issues

Docket No. AUS000181US1

regarding connections to the DB2 platform and Unix based Component Broker platform are also recorded.

A distributed environment service is able to insure that all platforms retain the same environment  
5 description. Yet the configuration that results provides for differing expressions based on platform and role within the distributed application.

The distributed environment definition, based on XML Working Definitions, provides for better support, since  
10 Component Broker Specialists and developers can examine the distributed environment to answer questions and address issues that arise as the middleware application is developed and deployed.

Most configuration problems become much more  
15 manageable because there is a strict, platform independent definition of exactly what the distributed environment really is. This is possible because all the definition of each application within the distributed environment is modeled as a system of constraints whose  
20 expression can be controlled by the system of constraints provided by each computer system.

The observation to make at this point is that the facilities described update the runtime environment in a manner that satisfies a set of constraints, just as we do  
25 manually currently. For example, the database may not, by nature, require a certain directory in an environment variable, such as, for example, the PATH or CLASSPATH. However, in our constructed environment of applications, new constraints are introduced. For example, an  
30 accounting application may support several different database applications with differing constraints for

Docket No. AUS000181US1

each. Settings within the accounting applications may also be determined by the databases, such as, for example, registry settings to database directories. Furthermore, these constraints may vary depending on what  
 5 features are required by the user.

From a user's perspective, their choices are fairly simple. They want a given database application and a given accounting package to run on a given operating system. The accounting package will be used to perform a  
 10 given subset of tasks of the many tasks the accounting package might support.

The database and the accounting package are, in this example, independent products. Currently, there is no industry standard method to define the relationship  
 15 between the database and the accounting package other than via some manual setup routine, or custom code. If this setup routine has to be repeated, and the custom code fails to be flexible enough to manage all the configurations within the systems for which it is  
 20 targeted, the result can lead to significant support and training costs. Under the current system, there is no way of defining and managing generically these kinds of interactions, such as the interaction between the database and the accounting package.

25 With reference now to **Figure 7B**, a block diagram illustrating the relationship between Working Definition defined software and the Working Definition defined environment in the context of the database and accounting package example is depicted in accordance with the  
 30 present invention. Working definitions can be used to define and manage interactions between applications.



Docket No. AUS000181US1

With a properly constructed set of working definitions  
**752** and **754** for the two applications (i.e., the database  
 and accounting package) involved, the user's choices  
 become another set of constraints. This set of  
 5 constraints is the environment working definition **756**  
 (i.e., constraints) that define the user's computing  
 environment. The computing environment specifies that  
 the database and accounting package exist plus the  
 constraints that define the proper runtime image for  
 10 these applications from the user's perspective.

Although described primarily with reference to  
 managing two applications, the present invention may, of  
 course, be applied to a data processing system having  
 many more than two applications which need to be  
 15 coordinated to work together properly. Furthermore, the  
 present invention, as illustrated in **Figure 7B**, has been  
 described primarily with reference to accounting  
 software, however, it will be obvious that the present  
 invention is not limited to managing accounting software,  
 20 but may manage any type of software written from  
 operation and execution on a data processing system, such  
 as, for example, word processors, e-mail programs, web  
 browsers, and graphics programs.

With reference now to **Figure 8**, a block diagram  
 25 illustrating a synchronization facility that monitors the  
 data processing system and continuously updates the  
 working definitions of the environment and applications  
 is depicted in accordance with the present invention.  
 The synchronization facility **804** monitors the data  
 30 processing system for modifications to the application  
 under development. As modifications to the application

Docket No. AUS000181US1

are discovered, synchronization facility **804** translates these changes into each view of the application on the current system. Thus, this synchronization facility **804** provides different views and representations of the same  
5 structures, such as source code, scrips, documents, and the like.

For example, in the context of software application development, there are typically many individuals involved in writing the source code, the developers, as  
10 well as other individuals involved in the build of the application who take all the comments and modifications of all the developers and integrate it into a cohesive unified software product. In addition to these groups of people, there are also individuals who construct test  
15 versions of the software application to ensure that it executes as intended. Integrated Development Environments (IDE) are very productive for the software developers (those individuals involved in writing the software code). However, for the production of builds  
20 and for testing purposes, the use of command line tools such as makefiles and command line compilers are preferred. However, the IDE and the command line tools are often incompatible. The IDE is provided one view of the application definition while the command line tools  
25 are provided with another view of the application definition.

With the present invention, changes made to the application definition in one view are detected by the synchronization facility **804** and reflected in the working  
30 definition defined view of the computer environments and applications. Thus, available to the other views of the

Docket No. AUS000181US1

application definition.

As another example, consider multiple users working with a document on a word processor. Perhaps, one user uses WordPerfect on an Apple Macintosh computer while  
 5 another user uses Microsoft Word on a Windows based computer for editing the document. The synchronization facility **804** constantly monitors the changes made to the document made by each user and updates the working definition of the encapsulated document appropriately.  
 10 When the other use receives the document, that user is able to view and edit the document using the other word processor without relying on an individual vendor to support the data format of the other word processor. This is because, the encapsulated document as represented  
 15 by the documents' working definitions describes everything that defines that document, including fonts, text, and processes for translating it between representations suitable for different word processors.

With reference now to **Figure 9**, a flowchart  
 20 illustrating a method of continuously updating the working definitions of the environment and applications within a data processing system such that different view into the same constructs may be obtained is depicted in accordance with a preferred embodiment of the present  
 25 invention. To start, the synchronization facility, such as, for example, synchronization facility **804** in **Figure 8**, monitors the data processing system for changes (step **902**) and first determines whether an indication the computer system is shutting down has occurred (step **904**).  
 30 If it is, then the process stops. If an indication that the computer system is shutting down is not received,

Docket No. AUS000181US1

then the synchronization facility determines if any changes have occurred (step **906**). If no event has occurred, then the synchronization facility continues to monitor the data processing system for changes (step

5 **902**).

If an Change has occurred within the data processing system, then the configuration facility determines whether the event will have an effect on any of the working definitions of any of the installed applications

10 or an the working definition of any of the computing environments (step **908**). If the change did not effect any of the working definitions, then the configuration facility ignores the change (step **910**) and continues monitoring the system for changes (step **902**).

15 If the change did effect the working definitions of an application or computing environment, then the appropriate one or ones of the working definitions are updated by the configuration facility to reflect the change (step **912**). Once the working definitions have

20 been updated to reflect the changes indicated by the detected change, the configuration facility updates the runtime representation of the views of the working definitions effected by the change (step **914**). Once the runtime images have been updated, the synchronization

25 facility continues monitoring the data processing system for new changes (step **902**).

The change may be an active event, such as, for example, a change to a file, such as a document used on a word processor or a source code file, or may be some

30 passive change to the data processing system. Thus, the effect of the change on the file is updated in the

Docket No. AUS000181US1

working definitions for that file and when a different application accesses that file that utilizes a different view of the data, a correct runtime version of the file may be generated from the working definition for that  
5 file.

With reference now to **Figure 10**, a block diagram illustrating the use of an application development server for providing the ability to build an application in total, with all aspects of building procedure,  
10 documentation, and issue tracking covered is depicted in accordance with the present invention. The application development server **1002** may be implemented as server **200** illustrated in **Figure 2A** and may be integrated into a network of computers such as, for example, server **104**  
15 connected to network **102** in **Figure 1**. The application development server **1002** is connected to a plurality of clients **1004-1008** via this network, which is not shown for ease of illustration.

Another continuing problem with software development  
20 in the prior art is the need to control and distribute environments that are fully and correctly configured. Furthermore, as the development of the software continued, changes to these environments also had to be distributed.

25 Currently, in the prior art, this is a manual and error prone effort. Each software development effort comes with its own learning curve as developers come up to speed with the configurations required, source tree, state of development, etc. Usually, the developer must  
30 construct their own development environment using imperfect instructions from a host of sources for each

Docket No. AUS000181US1

tool used. While this does work, it costs the development effort a significant amount of time, and produces odd effects as differences in environments produce different behaviors.

5       The source code for an application provides an incomplete definition from which the application is built. The missing pieces include the tools, build procedures, and environment configuration for building the application. The application development server **1002**  
10 provides the ability to build the application in total, with all aspects of building, procedure, documentation, and issue tracking covered.

Strong encapsulated environment technology, as defined by working definitions as discussed above, allows  
15 the application development server **1002** to deliver fully configured environments **1010**, configured to the requirements of the task (e.g., management, testing, development, etc.) on demand to each of several clients **1004**, **1006**, and **1008**. Of course, there may be many more  
20 clients than illustrated herein.

Thus, the application development server **1002** provides a single point of contact for everything required for application development, including, for example, the necessary tools, configuration settings, and  
25 source code. This ability is provided using the working definition defined environments **1010** and **1012** as defined by working definitions that is discussed above. The application development server **1002** provides web access that allows authenticated users to download and use a  
30 fully configured environment at a click of a link. The separation of environment and the runtime representation

Docket No. AUS000181US1

of that environment inherent with working definition defined environments allow the delivery of an environment, such as, for example, one of environments **1010** and **1012**, in this fashion.

5           The delivery of each environment **1010-1012** is added by its ability to make use of local facilities where those facilities match the environment's requirements. Because each environment **1010-1012** is completely pre-configured, all applications can be fully setup, automated, and documented through the application development server **1002**. If, the application development server **1002** is available through the Internet, rather than a private intranet, encrypted links may be shipped with the environment to provide support during development, testing, beta testing, and deployment of the application. Any number of encryption methods, such as, for example, RSA or elliptic curve cryptography, may be utilized. Such methods of encryption, as well as other methods, are well known in the art and will not be further discussed herein.

15           The application development server **1002** may also keep records of development team members, possibly through the use of IDs. This information may be correlated with the roles each team member plays in the development of the application. Thus, each member may be assigned certain privileges such that only certain versions of the runtime environment are available to that member depending on the needs of that member in performing the tasks of that team members respective role or roles.

Thus, as depicted in **Figure 10**, three clients have

Docket No. AUS000181US1

requested versions of the runtime images **1010-1012**.

Suppose that clients **1004-1006** have requested version A **1010** and that client **1008** has requested version B **1012**.

The application development server **1002** determines what  
 5 privileges each requesting client has. In the depicted  
 example, the application server **1002** has determined that  
 client **1006** has privileges to access version A **1010** and  
 has accordingly sent version A **1010** to client **1006**. The  
 application development server has also determined that  
 10 client **1008** is entitled to version B **1012** and has  
 accordingly sent version b **1012** to client **1008**. However,  
 the application server **1002** has determined that client  
**1004** is not entitled to version A **1010** as requested and  
 has thus sent a message to client **1004** that the request  
 15 is denied.

Client **1004** may have been denied, for example,  
 because client **1004** is entitled to receive only version B  
**1012** or because client **1004** has no privileges to receive  
 any of the versions **1010-1012** of the runtime environment.  
 20 Thus, each of clients **1006-1008** receives the runtime  
 environment necessary to perform the task assigned to  
 that client and the client **1004** which did not have  
 appropriate privileges has been denied, thus preserving  
 the security of the application as it is developed.

25 Those of ordinary skill in the art will appreciate  
 the fact that while **Figure 10** describes how the security  
 can enforce the roles assumed by various clients, the  
 same sorts of mechanisms can be used to distribute roles  
 without qualification, to distribute roles based off the  
 30 clients identity, or to strictly define a set of clients



Docket No. AUS000181US1

that are to play very particular roles within, for example, a workflow management, distributed computing, or parallel processing scenarios.

The application development server defines all of  
5 the roles in a development process. The application development server may also define the particular roles that team members perform. Furthermore, the application development server centralizes the definition and distribution of roles in a development process. Because  
10 any software application can be distributed this way and its state defined through its persistence, the application development server can be used to distribute computing environments to support any work flow application. For example, the application development  
15 server may define the role of an application developer, manager, and tester. However, it may also support a manufacturing assembly line workflow process where data processing systems are used to operate a variety of automated machines and tools.

20 Thus, although described with reference to managing software development, any form of work, including, for example, artwork, documents, web pages, spread sheets, and data bases, manufacturing, that is created through a process using multiple users and computer systems with  
25 multiple roles requiring a variety of configurations and environment settings may be configured and managed with the application development server.

Those skill in the art will also appreciate the fact that the representation provided to the clients may be  
30 through conventional data bases, web pages, Java servers, or any other distributed server interface.

Docket No. AUS000181US1

With reference now to **Figure 11**, a flowchart illustrating an exemplary method of providing working definition defined environments to clients for software development purposes is depicted in accordance with a preferred embodiment of the present invention. The application development server, such as, for example, application development server **1002** in **Figure 10**, receives, from a client, such as for example, client **1004** in **Figure 10**, a request for a particular version of a working definition defined environment (step **1102**). The application development server also receives a member identification from the requesting user (step **1104**). Steps **1102** and **1104** may be performed in reverse order or simultaneously and may have other processes intervening between execution of each step.

The application server uses the member ID to determine which working definition defined environment the requesting user has privileges to access based on the role or roles assigned that member (step **1106**). The application development server may keep a database of member IDs and corresponding roles that each member holds as well as a database of services and versions of environments that a particular member or role has privilege to access and use.

The application development server then determines whether the requesting user is entitled to access and use the requested environment (step **1108**). If the requesting user is not entitled to access, then a message that the request is denied is sent to the user (step **1114**) and the process ends. If the use is entitled to access and use the requested version of the runtime environment, then

Docket No. AUS000181US1

the requested working definition is sent to the requesting user (step **1110**). The working definition is then sent to the installer on the user's data processing system and is handled appropriately (step **1112**), at which point the process ends.

It is important to note that while the present invention has been described in the context of a fully functioning data processing system, those of ordinary skill in the art will appreciate that the processes of the present invention are capable of being distributed in the form of a computer readable medium of instructions and a variety of forms and that the present invention applies equally regardless of the particular type of signal bearing media actually used to carry out the distribution. Examples of computer readable media include recordable-type media, such as a floppy disk, a hard disk drive, a RAM, CD-ROMs, DVD-ROMs, and transmission-type media, such as digital and analog communications links, wired or wireless communications links using transmission forms, such as, for example, radio frequency and light wave transmissions. The computer readable media may take the form of coded formats that are decoded for actual use in a particular data processing system.

The description of the present invention has been presented for purposes of illustration and description, and is not intended to be exhaustive or limited to the invention in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art. The embodiment was chosen and described in order to best explain the principles of the invention,

Docket No. AUS000181US1

the practical application, and to enable others of ordinary skill in the art to understand the invention for various embodiments with various modifications as are suited to the particular use contemplated.

Docket No. AUS000181US1

**CLAIMS:**

What is claimed is:

- 5 1. An application development server, comprising:  
a storage unit for storing a plurality of working  
definitions for a plurality of computing environments;  
and  
an interface for receiving requests for one of the  
10 plurality of computing environments from and transferring  
the requested one of the plurality of computing  
environments to a client over a communications line;  
wherein  
the working definition for each computing  
15 environment is sufficient from which to construct a valid  
runtime image of the respective computing environment.
2. The application development server as recited in  
claim 1, wherein the network is the Internet.
- 20 3. The application development server as recited in  
claim 1, the working definitions define roles for  
application development and support the roles.
- 25 4. The application development server as recited in  
claim 1, wherein the working definitions define  
application development team members and a role each team  
member holds.
- 30 5. The application development server as recited in  
claim 1, wherein the encapsulated development environment

Docket No. AUS000181US1

comprises source code for the application.

6. The application development server as recited in  
claim 1, wherein encrypted links are sent to the client  
5 along with the encapsulated development environment, the  
encrypted links providing support for development,  
testing, beta testing, and deployment of the application.

7. The application development server as recited in  
10 claim 1, wherein the requested one of the plurality of  
computing environments supports the requesting clients  
role in a parallel processing application.

8. The application development server as recited in  
15 claim 1, wherein the working definition supports  
management of a workflow application.

9. The application development server as recited in  
claim 1, wherein the network is an intranet.

20 10. A method of providing an encapsulated development  
environment for automated software development to a  
client, the method comprising:

receiving a request for the encapsulated development  
25 environment, wherein the encapsulated development  
environment comprises platform independent definitions  
defining an application and environment from which a  
runtime representation of the environment may be  
constructed;  
30 retrieving the encapsulated development environment;  
and

Docket No. AUS000181US1

sending the encapsulated development environment to the client.

11. The method as recited in claim 10, further  
5 comprising:

receiving an update to the encapsulated development environment; and

modifying the encapsulated development environment to reflect such update.

10

12. A method of providing different views into a construct, the method comprising:

detecting a change within a data processing system;

responsive to a determination that the change  
15 effects a working definition of the construct, modifying the working definition of the construct to reflect a change indicated by the change; and

updating the runtime representations of the construct.

20

13. The method as recited in claim 12, wherein the change is an event.

14. A computer program product in computer readable  
25 media for use in a data processing system for providing an encapsulated development environment for automated software development to a client, the computer program product comprising:

first instructions for receiving a request for the  
30 encapsulated development environment, wherein the encapsulated development environment comprises platform

Docket No. AUS000181US1

independent definitions defining an application and environment from which a runtime representation of the environment may be constructed;

second instructions for retrieving the encapsulated  
5 development environment; and

third instructions for sending the encapsulated development environment to the client.

15. The computer program product as recited in claim 14,  
10 further comprising:

fourth instructions for receiving an update to the encapsulated development environment; and

fifth instructions for modifying the encapsulated development environment to reflect such update.

15

16. A computer program product in computer readable media for use in a data processing system for providing different views into a construct, the method comprising:

first instructions for detecting a change within a  
20 data processing system;

second instructions, responsive to a determination that the change effects a working definition of the construct, for modifying the working definition of the construct to reflect a change indicated by the change;  
25 and

third instructions for updating the runtime representations of the construct.

17. The computer program product as recited in claim 16,  
30 wherein the change is an event.



Docket No. AUS000181US1

18. A system for providing an encapsulated development environment for automated software development to a client, comprising:

means for receiving a request for the encapsulated  
5 development environment, wherein the encapsulated development environment comprises platform independent definitions defining an application and environment from which a runtime representation of the environment may be constructed;

10 means for retrieving the encapsulated development environment; and

means for sending the encapsulated development environment to the client.

15 19. The system as recited in claim 18, further comprising:

means for receiving an update to the encapsulated development environment; and

20 means for modifying the encapsulated development environment to reflect such update.

20. A system for providing different views into a construct, comprising:

25 means for detecting a change within a data processing system;

means, responsive to a determination that the change effects a working definition of the construct, for modifying the working definition of the construct to reflect a change indicated by the change; and

30 means for updating the runtime representations of the construct.

Docket No. AUS000181US1

21. The system as recited in claim 20, wherein the change is an event.

- 5 22. A memory for storing data for access by an application program executed on a data processing system, comprising:

a data structure stored in the memory, the data structure comprising:

- 10 a plurality of conditions; and

a plurality of working definitions; wherein each of the plurality of working definitions is sufficient from which to construct a valid runtime representation of a corresponding application; and

- 15 the plurality of conditions determine which of the plurality of working definitions are expressed on the occurrence of an event.

- 20 23. The memory as recited in claim 22, wherein the plurality of conditions determine which of the plurality of working definitions are suppressed on the occurrence of an event.

24. A synchronization facility for synchronizing various views of a construct: comprising:

detection means for detecting changes to the computer system;

comparison means for comparing the changes to working definitions of applications;

- 30 updating means for updating working definitions of effected applications to reflect the changes thereby

5

construction means for constructing an updated valid runtime representation of the effected applications using updated working definitions.

Docket No. AUS000181US1


# **ABSTRACT OF THE DISCLOSURE**


## **A MECHANISM FOR PROVIDING DIFFERENT VIEWS INTO THE SAME**

### **5 CONSTRUCTS WITHIN A STRONGLY ENCAPSULATED ENVIRONMENT**

An application development server for aid in developing software and a system, method, and apparatus for updating continuously the working definitions of an  
 10 encapsulated application such that different views of a construct may be supported and that changes made in one view of the construct may be reflected in the other views of the construct. In a preferred embodiment of the application development server, the application server  
 15 includes a processor, a memory unit, a storage unit, and a communications link to a network. The working definition defined environment is stored on the storage unit. The processor executes instructions stored in the memory unit that allow the application development server  
 20 to receive requests for working definition defined environments from clients, retrieve the working definition defined environment from the storage unit and send the working definition defined environment to the client via the communications link to the network.

25




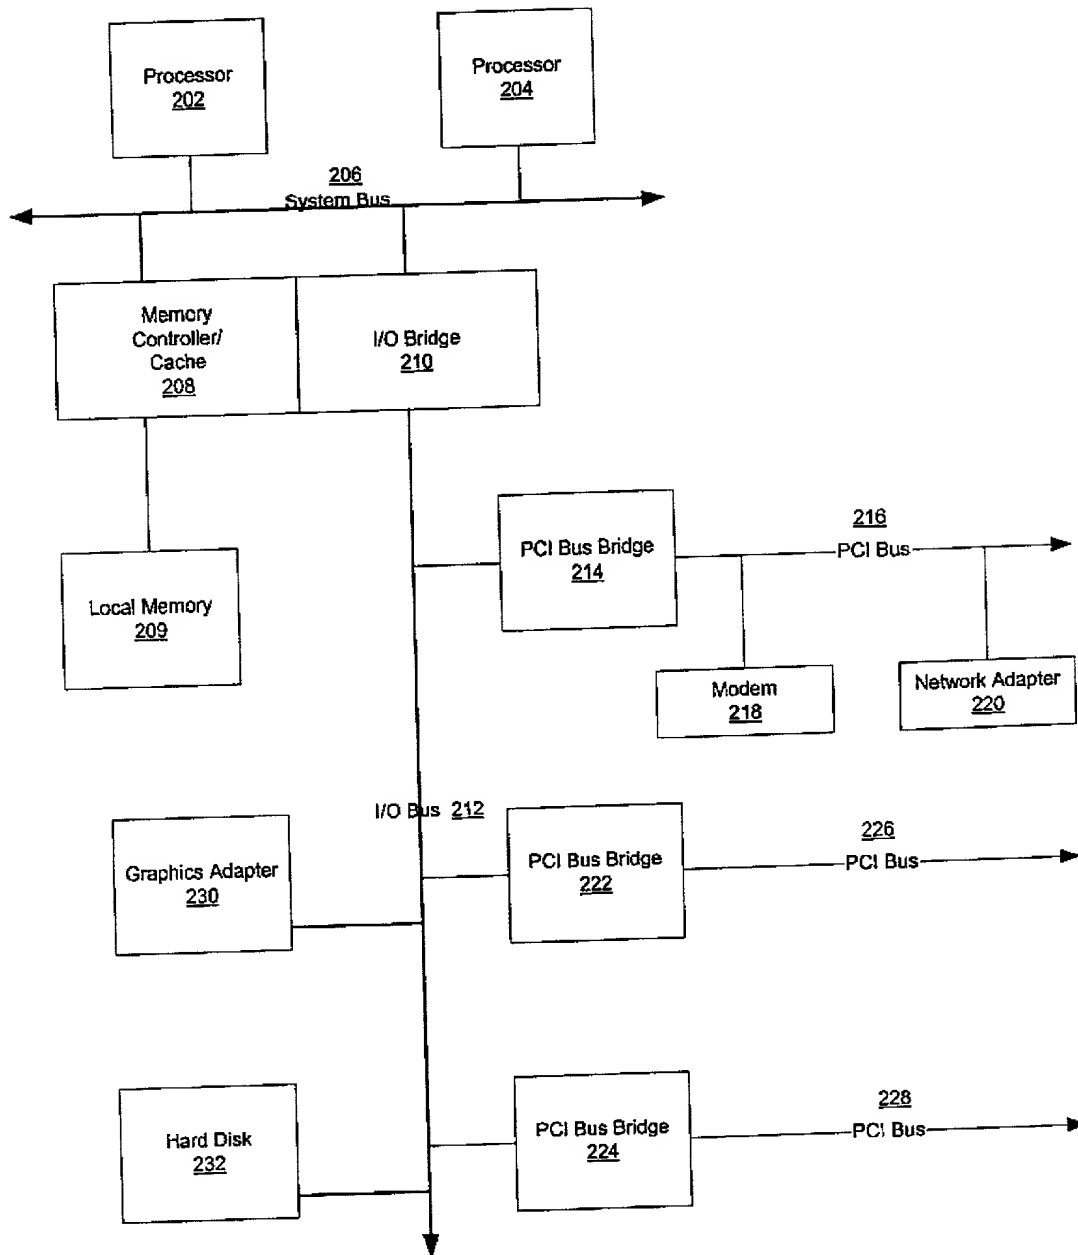


200  
Server

Figure 2

AUS000181US1

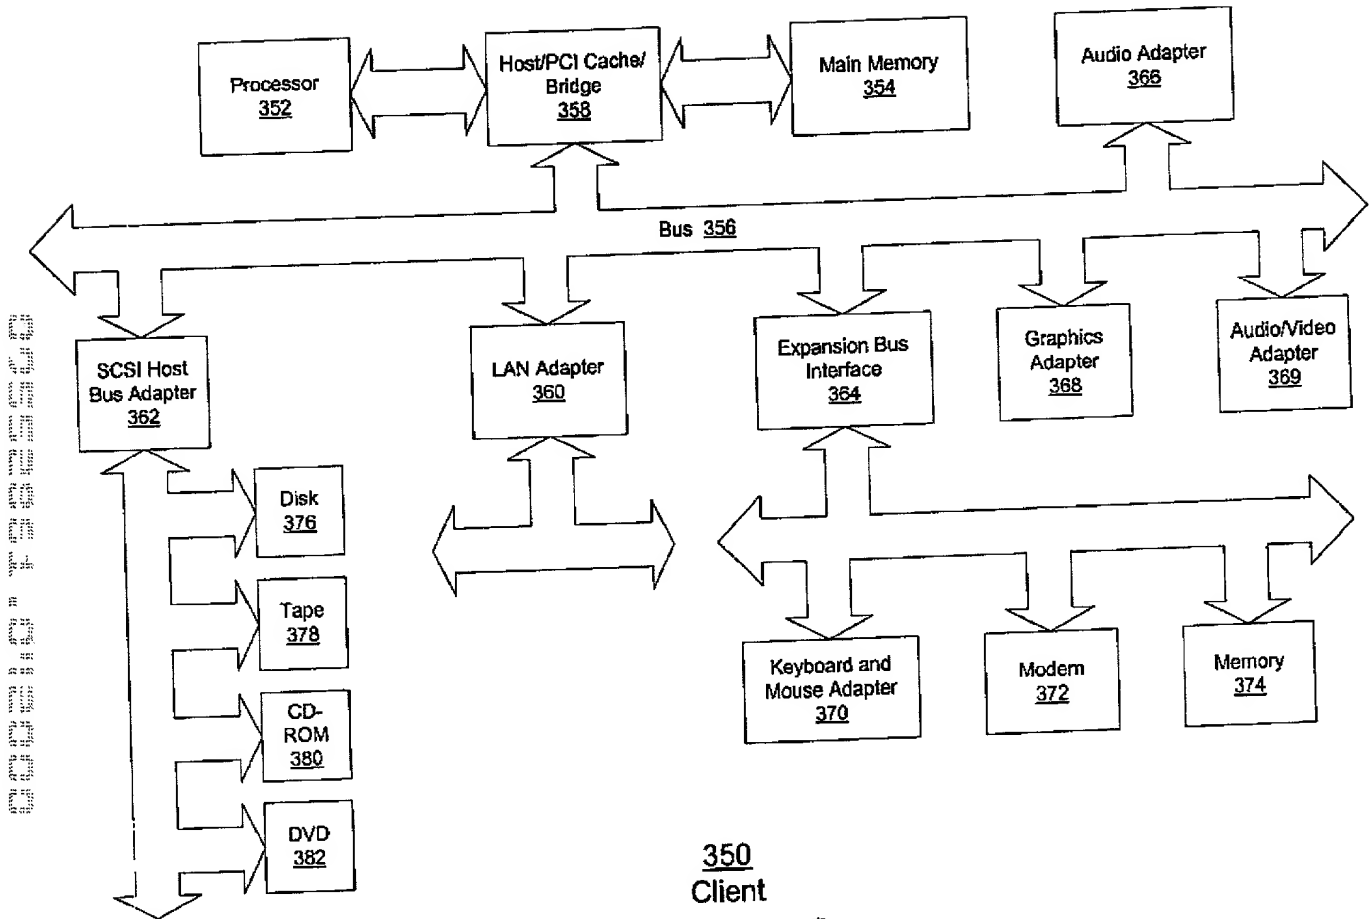


350  
Client  
**Figure 3**  
AUS000181US1

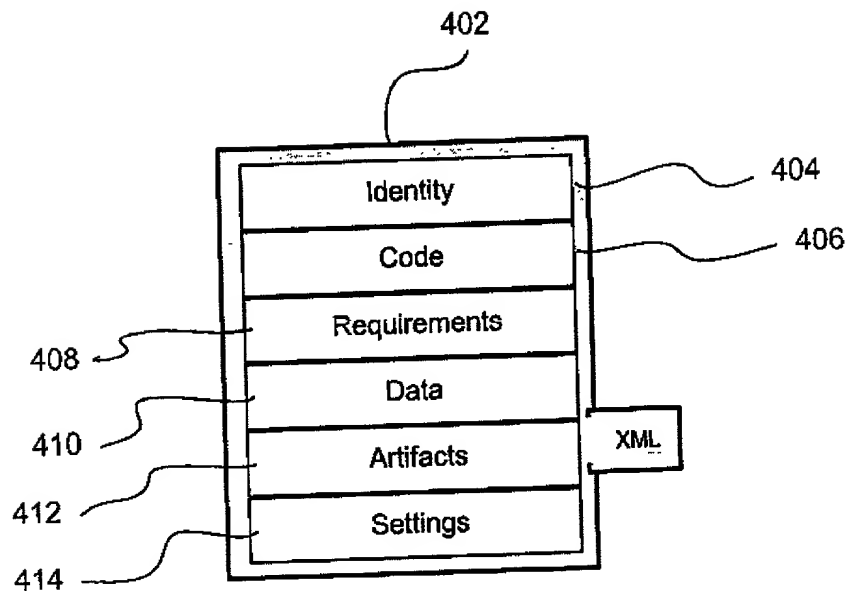

The Application's  
Working Definition

Figure 4A

AUS000179US1

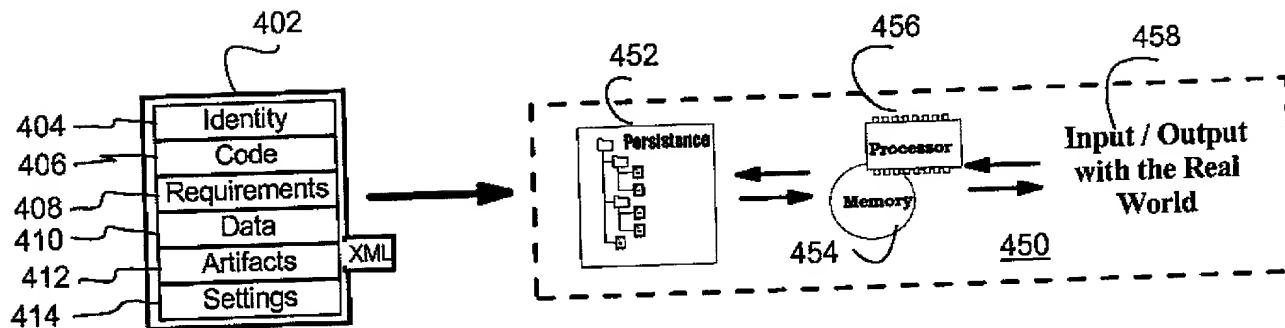

The Application's  
Working Definition

The Application's  
Runtime Representation

400

Figure 4B

AUS000181US1



```

502 <requirements>
    <platform>
        <processor>xx86</processor>
        <os>"Windows 95" or "Windows 98" or "Windows NT" </os>
    </platform>
    <services>
        <service>TCP/IP</service>
        <service>File System</service>
    </services>
    <prereqs>
        <application>Acrobat</application>
    </prereqs>
    <registryEntry name="HKEY_CURRENT_USER/Software/X.Com">
        <key>DebugPort<value>TCP/IP Port#</value></key>
        <key>Java VM<value>x<test>x gt "1.1.6"</test></value></key>
    </registryEntry>
    <directory name="programRoot"/>
    <directory name="jclass">programRoot"/jclass</directory>
    <environmentVar name=path>
        <add>bin</add>
    </environmentVar>
    <environmentVar name=classpath>
        <add>jclass"/jappNetUI.jar"</add>
        <test>programRoot"/testClasspath"</test>
    </environmentVar>
    </requirements>

```

500

## Figure 5

AUS000181US1


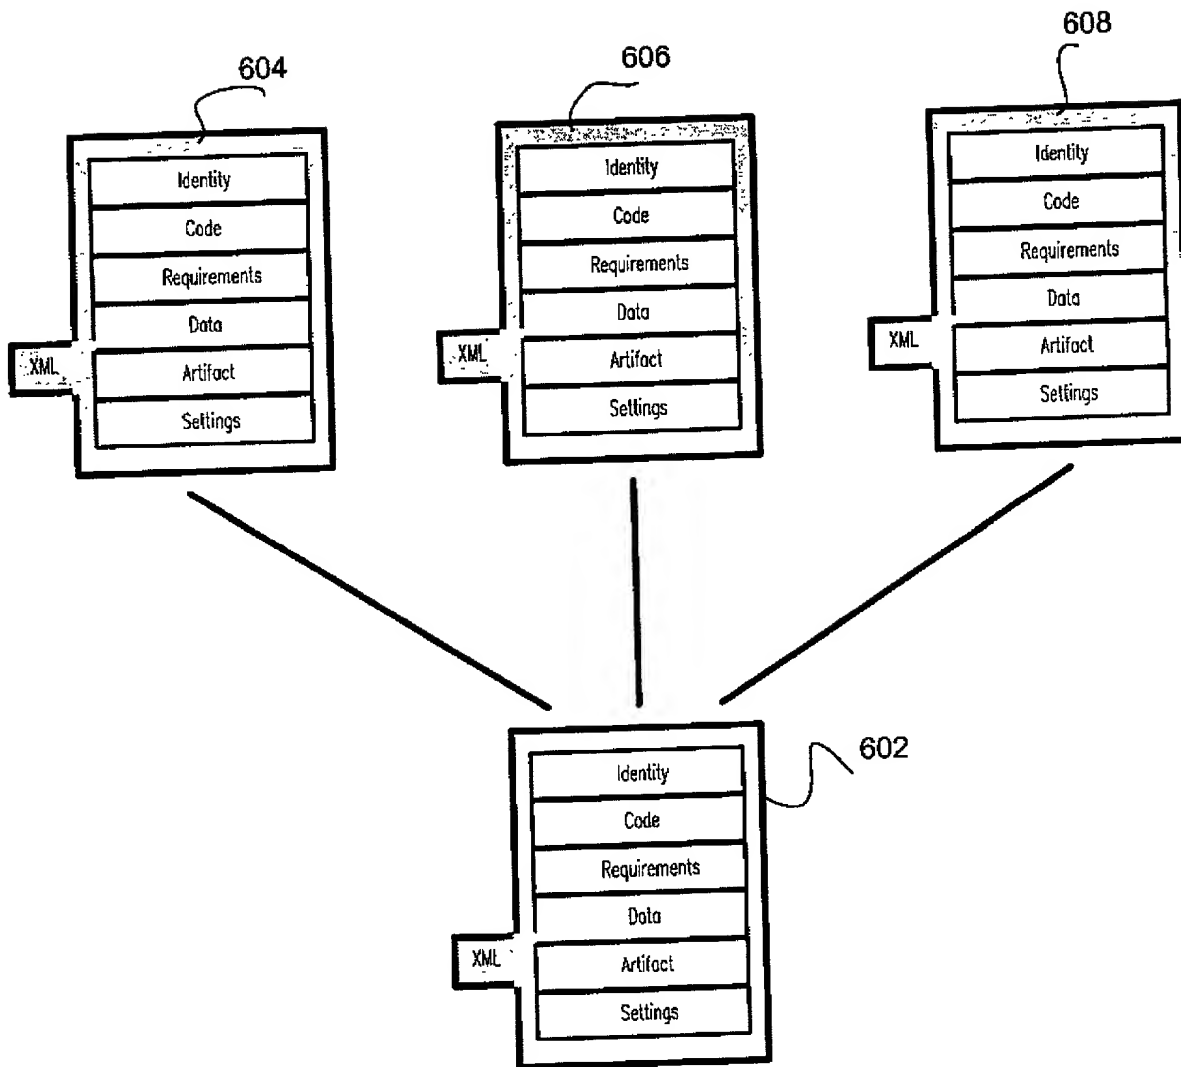


Figure 6

AUS000181US1

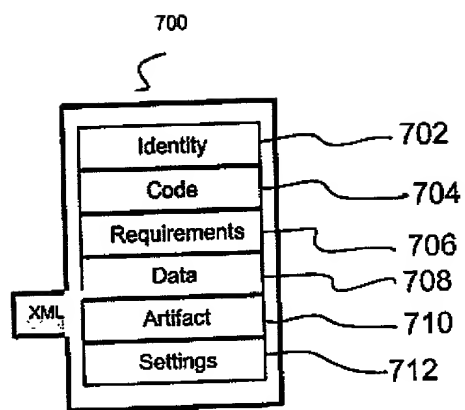

## The User's Computing Environment

Figure 7A

AUS000180US1

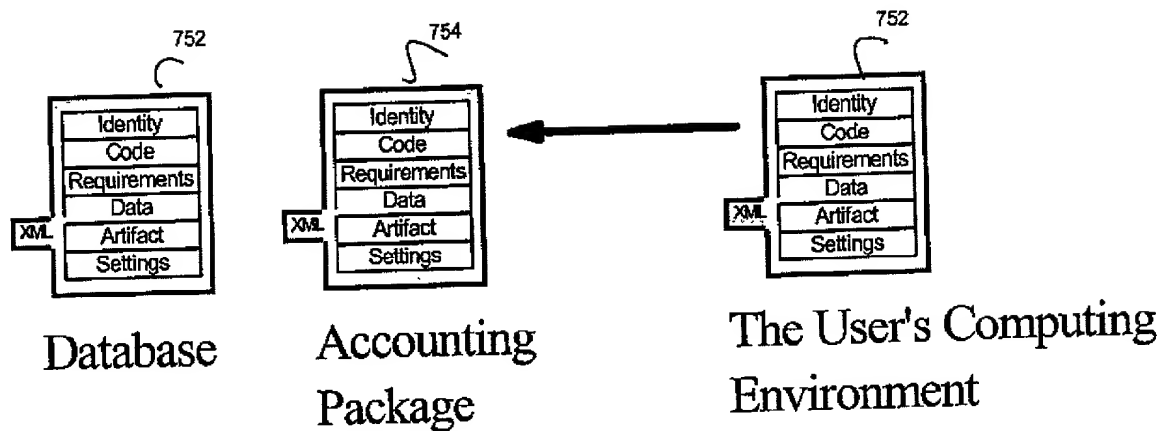


Figure 7B

AUS000181US1

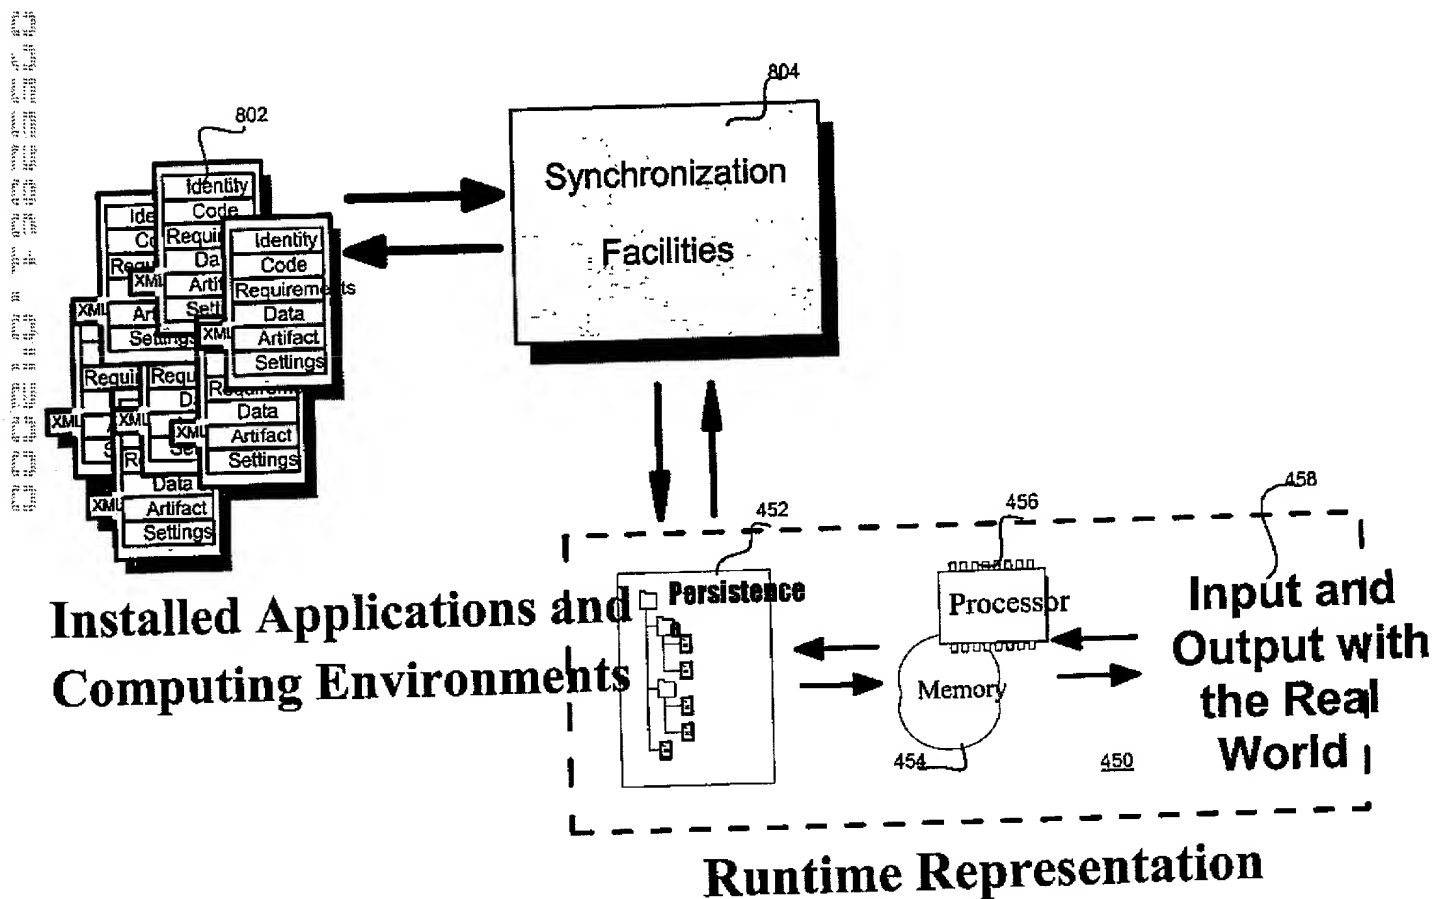


Figure 8

AUS000181US1

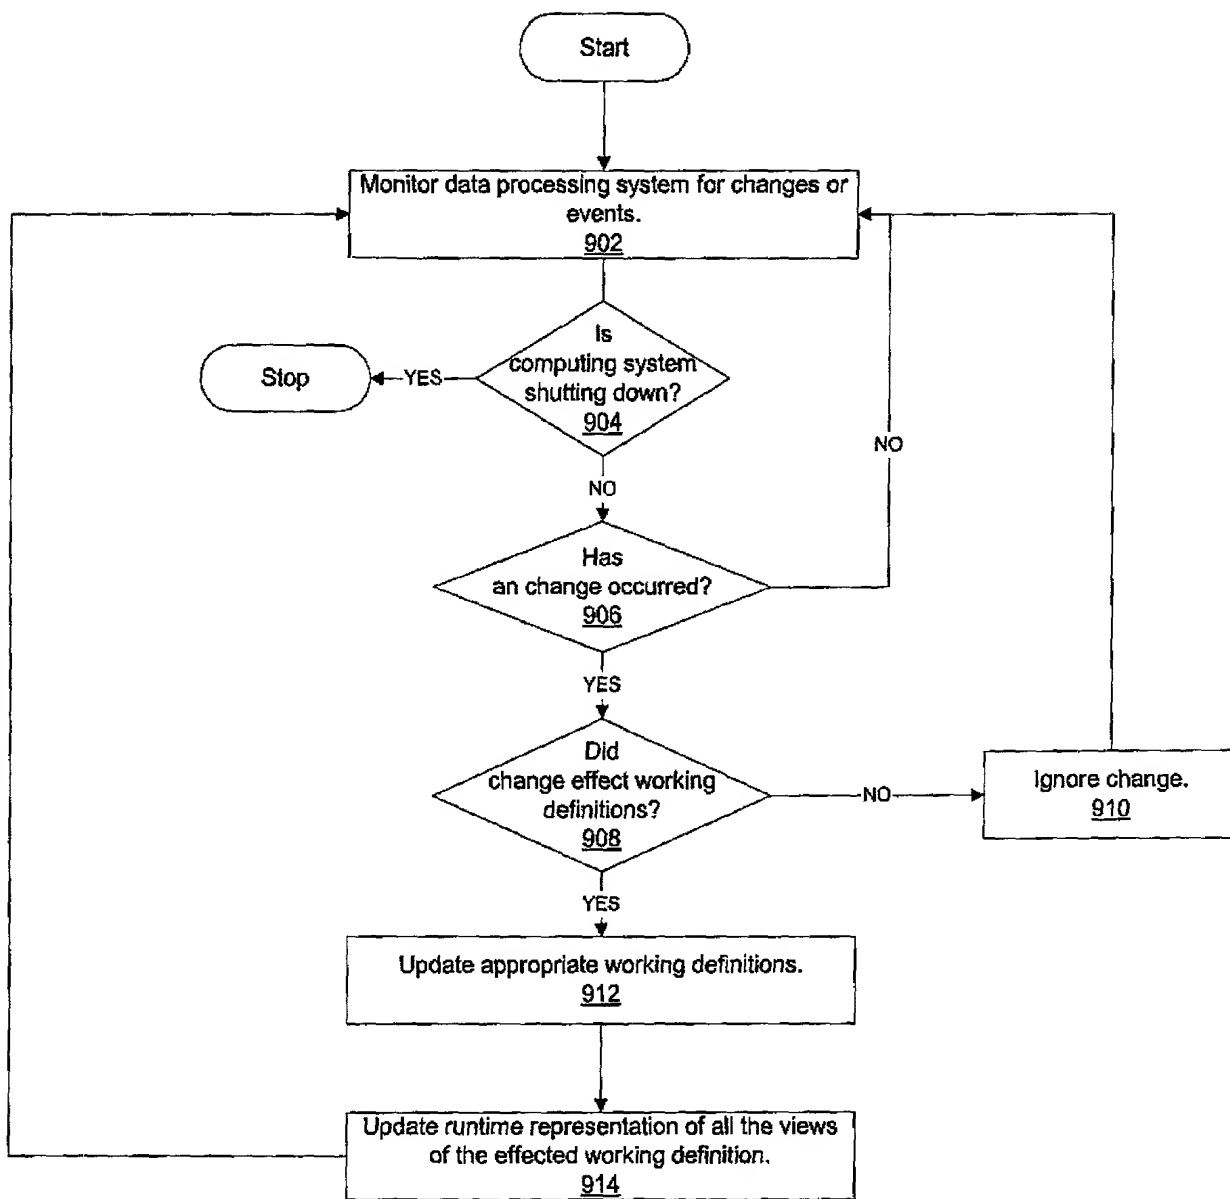


Figure 9

AUS000181US1

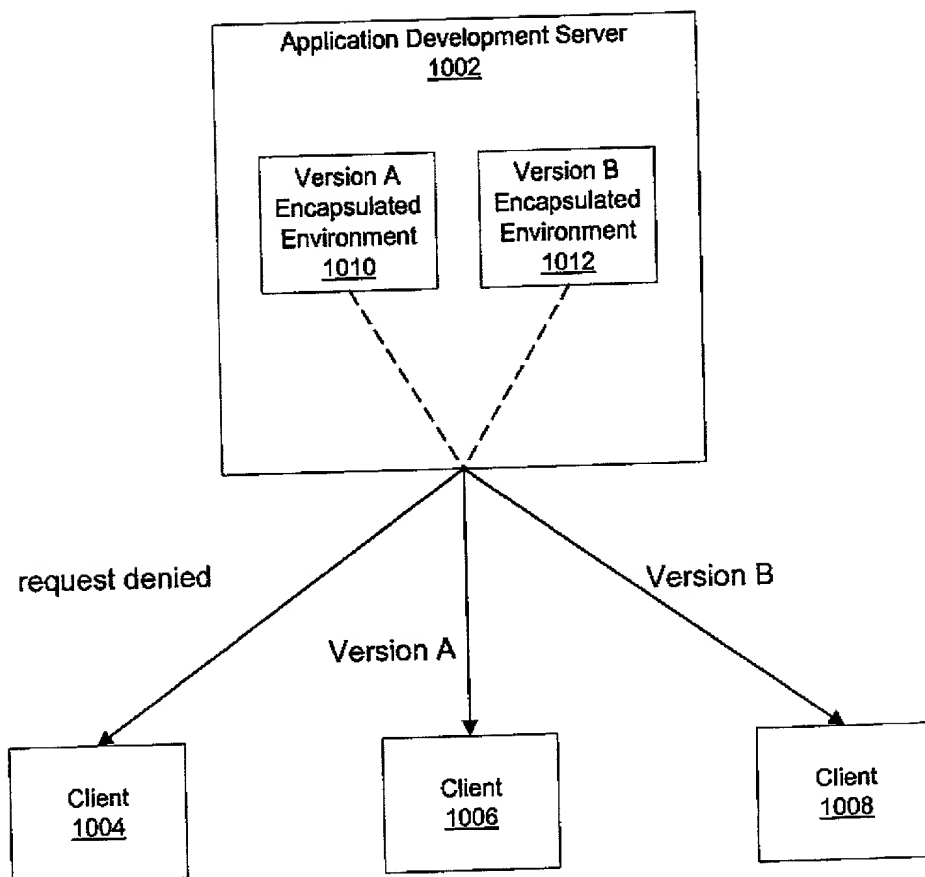


Figure 10

AUS000181US1

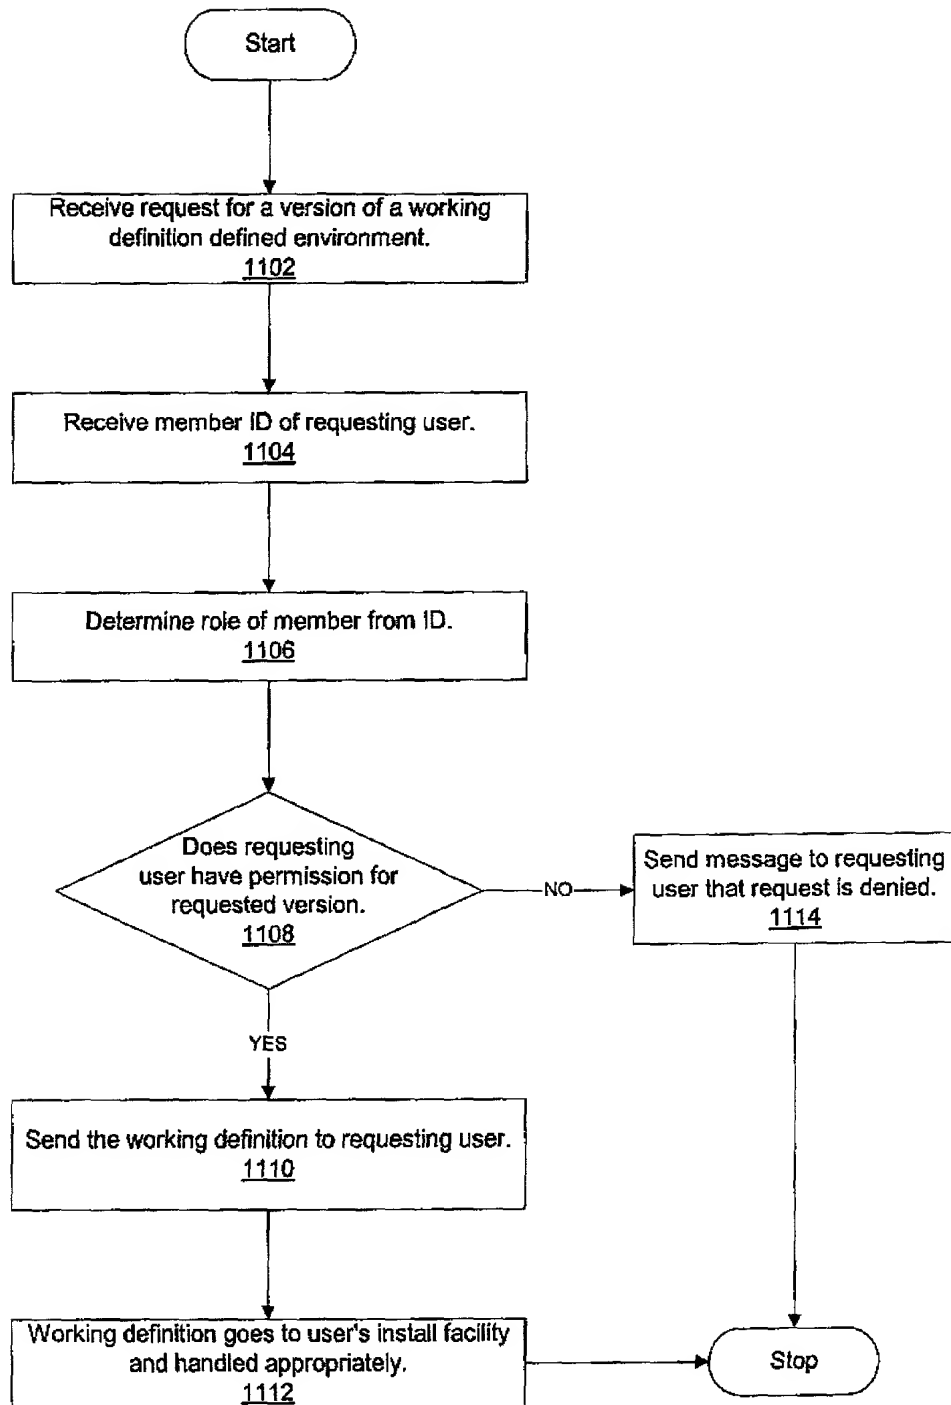


Figure 11

AUS000181US1

DOCKET NUMBER: AUS000181US1

**DECLARATION AND POWER OF ATTORNEY FOR  
PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**AN APPLICATION DEVELOPMENT SERVER AND A MECHANISM FOR PROVIDING DIFFERENT  
VIEWS INTO THE SAME CONSTRUCTS WITHIN A STRONGLY ENCAPSULATED ENVIRONMENT**

the specification of which (check one)

X is attached hereto.

\_\_\_ was filed on \_\_\_\_\_  
as Application Serial No. \_\_\_\_\_  
and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

|                               |                            |
|-------------------------------|----------------------------|
| Prior Foreign Application(s): | Priority Claimed           |
| _____                         | ___ Yes ___ No             |
| (Number)                      | (Country) (Day/Month/Year) |

I hereby claim the benefit under Title 35, United States Code, §120 of any



DOCKET NUMBER: AUS000181US1

United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

---

(Application Serial #)

(Filing Date)

(Status)

---

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

John W. Henderson, Jr., Reg. No. 26,907; Thomas E. Tyson, Reg. No. 28,543; James H. Barksdale, Jr., Reg. No. 24,091; Casimer K. Salys, Reg. No. 28,900; Robert M. Carwell, Reg. No. 28,499; Douglas H. Lefevre, Reg. No. 26,193; Jeffrey S. LaBaw, Reg. No. 31,633; David A. Mims, Jr., Reg. 32,708; Volol Emile, Reg. No. 39,969; Anthony V. England, Reg. No. 35,129; Leslie A. Van Leeuwen, Reg. No. 42,196; Christopher A. Hughes, Reg. No. 26,914; Edward A. Pennington, Reg. No. 32,588; John E. Hoel, Reg. No. 26,279; Joseph C. Redmond, Jr., Reg. No. 18,753; Marilyn S. Dawkins, Reg. No. 31,140; Mark E. McBurney, Reg. No. 33,114; Duke W. Yee, Reg. No. 34,285; Colin P. Cahoon, Reg. No. 38,836; Rudolph J. Buchel, Reg. No. 43,448; and Stephen R. Loe, Reg. No. 43,757, Stephen J. Walder, Reg. No. 41,534.

Send correspondence to: Duke W. Yee, Carstens, Yee & Cahoon, LLP, P.O. Box 802334, Dallas, Texas 75380 and direct all telephone calls to Duke W. Yee, (972) 367-2001

FULL NAME OF SOLE OR FIRST INVENTOR: PAUL ALAN SNOWINVENTORS SIGNATURE: Paul Alan Snow DATE: April 13, 2000RESIDENCE: 172 ORCHARD WAY  
RICHLAND, WASHINGTON 99352CITIZENSHIP: UNITED STATES

DOCKET NUMBER: AUS000181US1

POST OFFICE ADDRESS: SAME AS ABOVE